New Built-In Model BI-42S Side-by-Side

Model BI-42S offers convenient side-by-side refrigeration in a 42-inch width. Sub-Zero dual refrigeration along with new air purification and water filtration systems guard the freshness of your food and water like nothing before. Framed, overlay/flush inset and stainless steel models are available. A new flush inset installation option allows the unit to sit flush with surrounding cabinetry.

Framed Model BI-42S.

Features

- Framed, overlay/flush inset and stainless steel design applications
- Flush inset installation option allows unit to sit flush with surrounding cabinetry
- Air purification system
- Water filtration system
- Dual refrigeration system
- Flip-up grille for easy access to condenser
- Evenly-distributed bright interior lighting
- Door shelves are adjustable in one-inch increments
- Crisper and deli drawers form a special low-temperature zone
- Informational freshness cards inside unit
- Max ice feature to increase rate of ice production for a 24-hour period
- Exceeds tough Department of Energy standards

This appliance is certified by Star-K to meet strict religious regulations in conjunction with specific instructions found on www.star-k.org.

Flip-Up Grille

Air Purification System

Model Options	BI-42S/F	BI-42S/O	BI-42S/S/TH	BI-42S/S/PH	BI-42S/S/CH
Design	Framed	Overlay/Flush Inset	Stainless	Stainless	Stainless
Grille	Louvered	Panel	Stainless	Stainless	Stainless
Handle	Full-Length	*	Tubular	Pro	Curved

**Handle not included to allow for design flexibility.*

Interior Features

- **Refrigerator**
  16.0 cu ft Capacity
  Air Purification System
  4 Adjustable Glass Shelves
  1 Stationary Glass Shelf
  1 High-Humidity Drawer with Divider
  2 Storage Drawers with Divider
  3 Adjustable Door Shelves
  2 Stationary Door Shelves
  Adjustable Dairy Compartment
- **Freezer**
  8.0 cu ft Capacity
  Water Filtration System
  Automatic Ice Maker
  3 Adjustable Wire Shelves
  1 Stationary Solid Shelf
  3 Storage Drawers
  5 Adjustable Door Shelves

Model BI-48S shown.

Accessories

- Louvered, panel and stainless steel grilles for 83", 84" and 88" finished heights
- Stainless steel front panels for framed and flush inset applications with stainless steel finish and handle options
- Side panels in classic stainless steel and white
- Stainless steel tubular, pro or curved handles and full-length extended handles
- Dozen egg container with lid
- 90° door stop kit

Accessories are available through your Sub-Zero dealer. To obtain local dealer information, visit the Showroom Locator section of our website, subzero.com.

SUB-ZERO **Built-In Model BI-42S**

Overall Dimensions

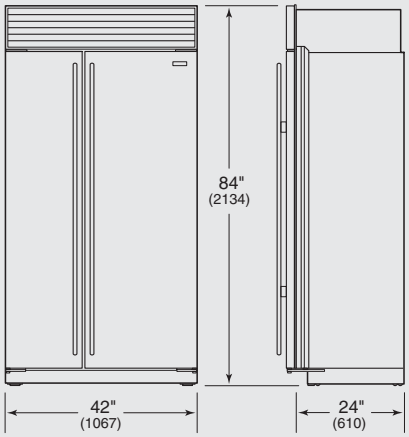



Unit dimensions may vary by ± 1/8" (3).

Specifications

Overall Dimensions	42"W x 84"H x 24"D
Door Clearance	26 5/16"
Opening Width Flush Inset Width	41 1/2" 44"
Opening Height Flush Inset Height	83 3/4" 84"
Opening Depth Flush Inset Depth	24" 26 3/16"
Electrical Requirements	115 V AC, 60 Hz 15 amp circuit
Plumbing Requirements	1/4" OD copper line 30–100 psi
Shipping Weight	541–582 lbs

Installation Notes

Built-In models may be used in a standard installation or in a flush inset installation which allows the unit to be flush with surrounding cabinetry.

Complete installation specifications, including panel sizes, can be found on our website, subzero.com.

Installation Specifications

Standard Installation

**Anti-tip bracket must not interfere with water line. Extend water line approximately 36" from back wall.*

Dimensions in parentheses are in millimeters unless otherwise specified.

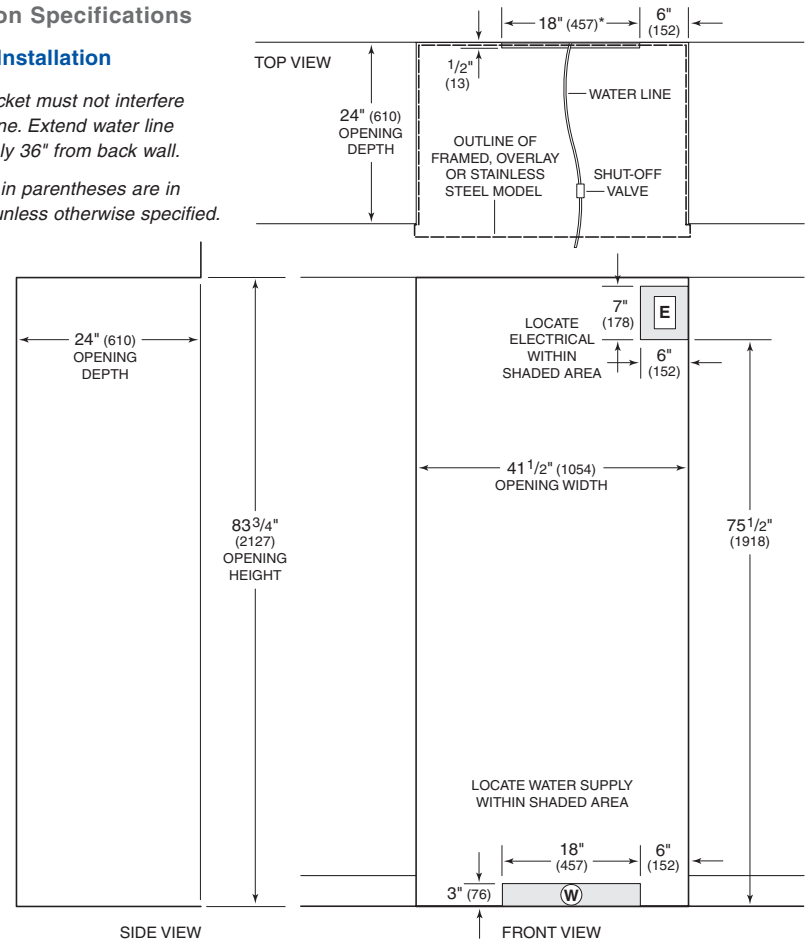

Flush Inset Installation

**Anti-tip bracket must not interfere with water line. Extend water line approximately 36" from back wall.*

***Dimensions based on 3/4" (19) panels.*